

# Atlassian

Summary Report

# Table of contents

---

<b>1</b>	<b>Executive summary</b>	<b>2</b>
<b>2</b>	<b>Reporting and methodology</b>	<b>3</b>
	Background	3
<b>3</b>	<b>Targets and scope</b>	<b>4</b>
	Scope	4
<b>4</b>	<b>Findings summary</b>	<b>6</b>
	Findings by severity	6
	Risk and priority key	7
<b>5</b>	<b>Appendix</b>	<b>8</b>
	Submissions over time	8
	Submissions signal	8
	Bug types overview	9
<b>6</b>	<b>Closing statement</b>	<b>10</b>

**Atlassian** engaged Bugcrowd, Inc. to perform an Ongoing Bounty Program, commonly known as a crowd-sourced penetration test.

An Ongoing Bounty Program is a cutting-edge approach to an application assessment or penetration test. Traditional penetration tests use only one or two personnel to test an entire scope of work, while an Ongoing Bounty leverages a crowd of security researchers. This increases the probability of discovering esoteric issues that automated testing cannot find and that traditional vulnerability assessments may miss in the same testing period.

The purpose of this program was to identify security vulnerabilities in the targets listed in the targets and scope section. Once identified, each vulnerability was rated for technical impact defined in the findings summary section of the report.

This report shows testing for **Atlassian's** targets during the period of: **10/01/2023 – 12/31/2023**.

For this Ongoing Program, submissions were received from **246** unique researchers.

The continuation of this document summarizes the findings, analysis, and recommendations from the Ongoing Bounty Program performed by Bugcrowd for **Atlassian**.


This report is just a summary of the information available.

All details of the program's findings — comments, code, and any researcher provided remediation information — can be found in the Bugcrowd [Crowdcontrol](#) platform.

## Background

The strength of crowdsourced testing lies in multiple researchers, the pay-for-results model, and the varied methodologies that the researchers implement. To this end, researchers are encouraged to use their own individual methodologies on Bugcrowd Ongoing programs.

The workflow of every penetration test can be divided into the following four phases:

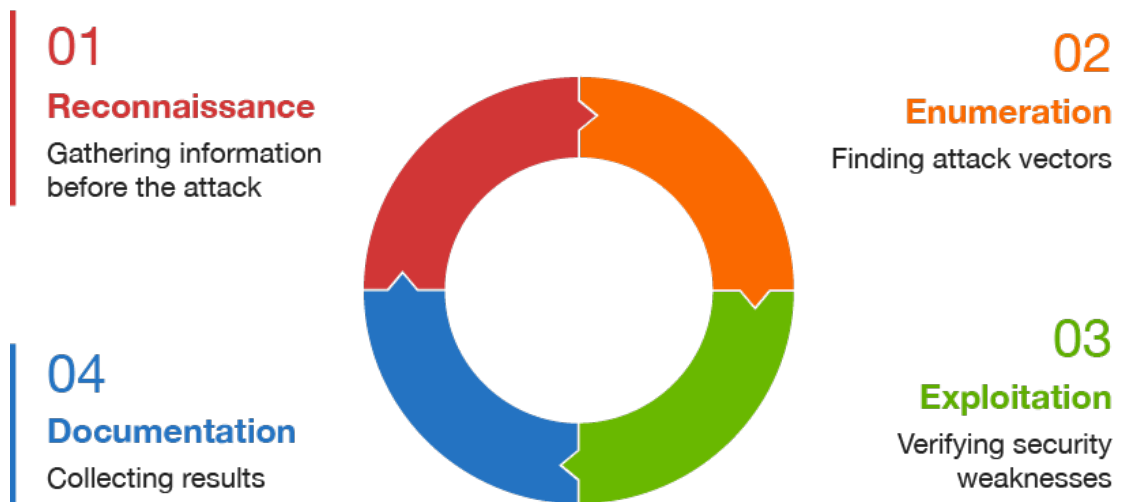

Bugcrowd researchers who perform web application testing and vulnerability assessment usually subscribe to a variety of methodologies following the highlighted workflow, including the following:



### Scope

Prior to the Ongoing program launching, Bugcrowd worked with Atlassian to define the Rules of Engagement, commonly known as the program brief, which includes the scope of work. The following targets were considered explicitly in scope for testing:

All details of the program scope and full program brief can be reviewed in the [Atlassian](#).

Atlassian Access (<https://admin.atlassian.com/atlassian-access>)

Atlassian Admin (<https://admin.atlassian.com/>)

Atlassian Identity (<https://id.atlassian.com/login>)

Atlassian Start (<https://start.atlassian.com>)

Bitbucket Cloud including Bitbucket Pipelines (<https://bitbucket.org>)

Confluence Cloud (bugbounty-test-<bugcrowd-name>.atlassian.net/wiki)

Confluence Cloud Premium (bugbounty-test-<bugcrowd-name>.atlassian.net/wiki)

Confluence Cloud Mobile App for Android

Confluence Cloud Mobile App for iOS

Jira Cloud Mobile App for Android

Jira Cloud Mobile App for iOS

Jira Service Management Cloud (bugbounty-test-<bugcrowd-name>.atlassian.net)

Jira Software Cloud (bugbounty-test-<bugcrowd-name>.atlassian.net)

Jira Work Management Cloud formerly Jira Core (bugbounty-test-<bugcrowd-name>.atlassian.net)

Any associated \*.atlassian.com or \*.atl-paas.net domain that can be exploited DIRECTLY from the \*.atlassian.net instance

Atlassian Compass

Atlassian Marketplace (<https://marketplace.atlassian.com>)

Atlassian Atlas


Bitbucket Data Center

Confluence Data Center

<b>Crowd</b>
<b>Jira Core Data Center</b>
<b>Jira Service Management Data Center</b>
<b>Jira Software Data Center</b>
<b>*.atlastunnel.com</b>
<b>Any other *.atlassian.com or *.atl-paas.net domain that cannot be exploited directly from a *.atlassian.net instance</b>
<b>Bamboo</b>
<b>Confluence Companion App for macOS and Windows</b>
<b>Confluence Data Center Mobile App for Android</b>
<b>Confluence Data Center Mobile App for iOS</b>
<b>Crucible</b>
<b>FishEye</b>
<b>Jira Data Center Mobile App for Android</b>
<b>Jira Data Center Mobile App for iOS</b>
<b>Sourcetree for macOS and Windows (<a href="https://www.sourcetreeapp.com/">https://www.sourcetreeapp.com/</a>)</b>
<b>Other - (all other Atlassian targets)</b>
<b>Jira Product Discovery</b>
<b>Beacon</b>
<b>Forge Platform</b>
<b>GraphQL API (bugbounty-test-&lt;bugcrowd-name&gt;.atlassian.net/gateway/api/graphql)</b>
<b><a href="https://www.npmjs.com/package/@forge/cli">https://www.npmjs.com/package/@forge/cli</a></b>

### Findings by severity

The following chart shows all valid assessment findings from the program by technical severity.

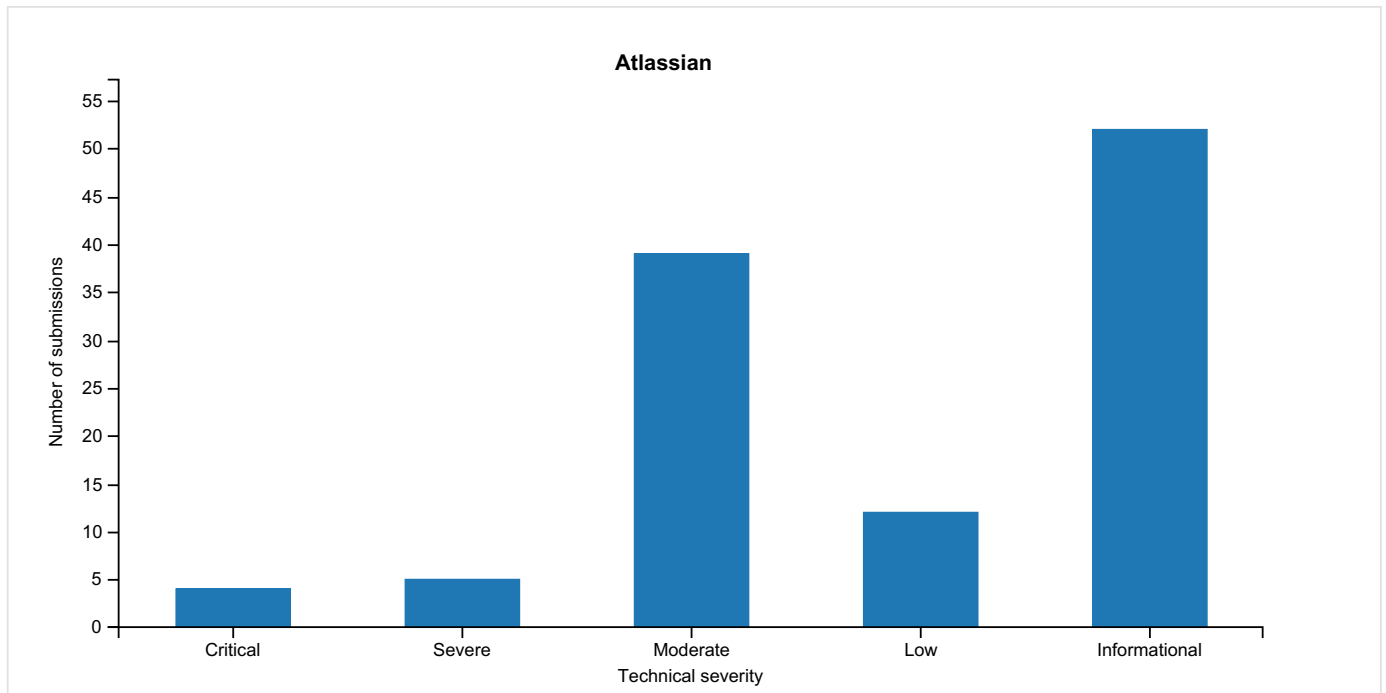

## Risk and priority key

The following key is used to explain how Bugcrowd rates valid vulnerability submissions and their technical severity. As a trusted advisor Bugcrowd also provides common "next steps" for program owners per severity category.

### TECHNICAL SEVERITY

### EXAMPLE VULNERABILITY TYPES

#### Critical

Critical severity submissions (also known as "P1" or "Priority 1") are submissions that are escalated to **Atlassian** as soon as they are validated. These issues warrant the highest security consideration and should be addressed immediately. Commonly, submissions marked as Critical can cause financial theft, unavailability of services, large-scale account compromise, etc.

- Remote Code Execution
- Vertical Authentication Bypass
- XML External Entities Injection
- SQL Injection
- Insecure Direct Object Reference for a critical function

#### High

High severity submissions (also known as "P2" or "Priority 2") are vulnerability submissions that should be slated for fix in the very near future. These issues still warrant prudent consideration but are often not availability or "breach level" submissions. Commonly, submissions marked as High can cause account compromise (with user interaction), sensitive information leakage, etc.

- Lateral authentication bypass
- Stored Cross-Site Scripting
- Cross-Site Request Forgery for a critical function
- Insecure Direct Object Reference for an important function
- Internal Server-Side Request Forgery

#### Medium

Medium severity submissions (also known as "P3" or "Priority 3") are vulnerability submissions that should be slated for fix in the major release cycle. These vulnerabilities can commonly impact single users but require user interaction to trigger or only disclose moderately sensitive information.

- Reflected Cross-Site Scripting with limited impact
- Cross-Site Request Forgery for an important function
- Insecure Direct Object Reference for an unimportant function

#### Low

Low severity submissions (also known as "P4" or "Priority 4") are vulnerability submissions that should be considered for fix within the next six months. These vulnerabilities represent the least danger to confidentiality, integrity, and availability.

- Cross-Site Scripting with limited impact
- Cross-Site Request Forgery for an unimportant function
- External Server-Side Request Forgery

#### Informational

Informational submissions (also known as "P5" or "Priority 5") are vulnerability submissions that are valid but out-of-scope or are "won't fix" issues, such as best practices.

- Lack of code obfuscation
- Autocomplete enabled
- Non-exploitable SSL issues



### Bugcrowd's Vulnerability Rating Taxonomy


More detailed information regarding our vulnerability classification can be found at: <https://bugcrowd.com/vrt>



Included in this appendix are auxiliary metrics and insights into the Ongoing program. This includes information regarding submissions over time, payouts and prevalent issue types.

**Submissions over time**


The timeline below shows submissions received and validated by the Bugcrowd team:

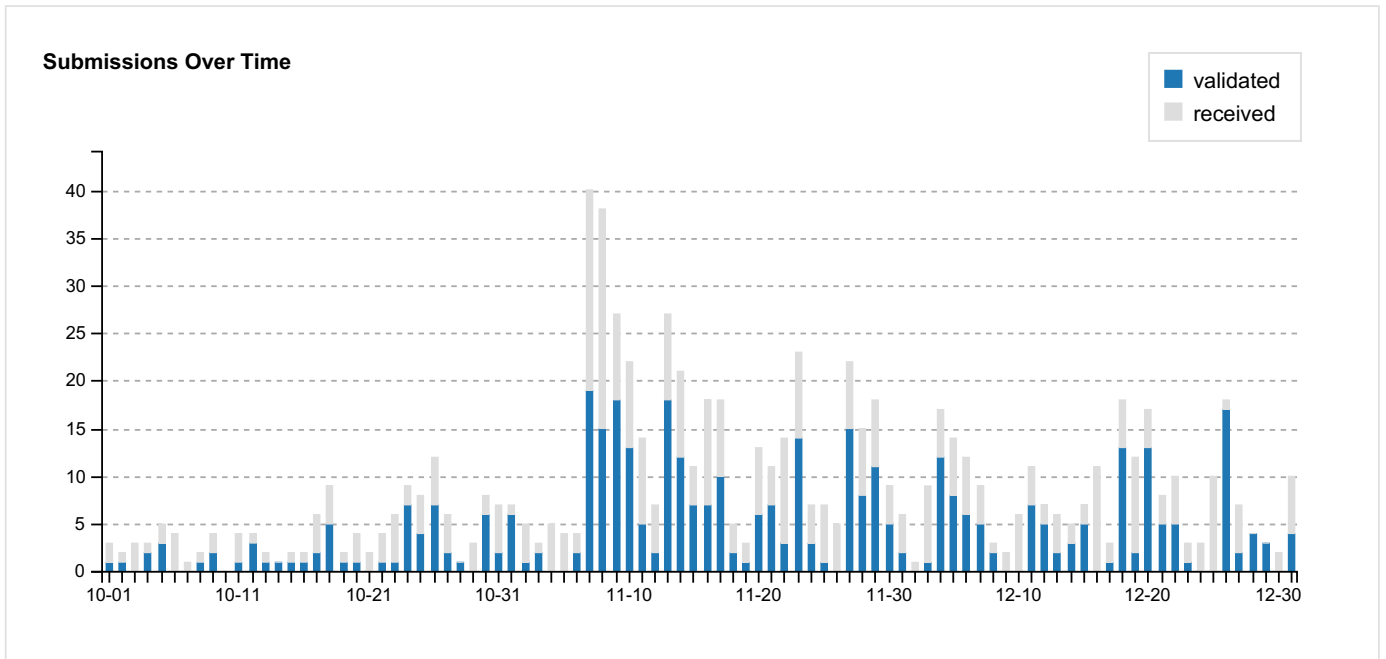

**Submissions signal**


A total of **415** submissions were received, with **112** unique valid issues discovered. Bugcrowd identified **51** informational submissions, **61** duplicate submissions, removed **235** invalid submissions, and is processing **7** submissions. The ratio of unique valid submissions to noise was **28%**.

Submission Outcome	Count
Valid	112
Informational	51
Invalid	235
Duplicate	61
Processing	7
<b>Total</b>	<b>415</b>

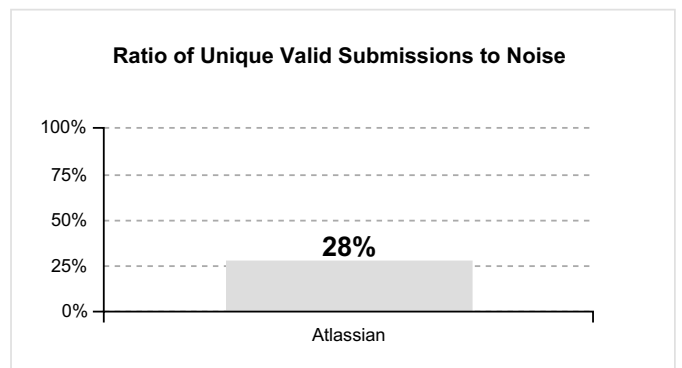

## Bug types overview

This distribution across bug types for the Ongoing program only includes unique and valid submissions.

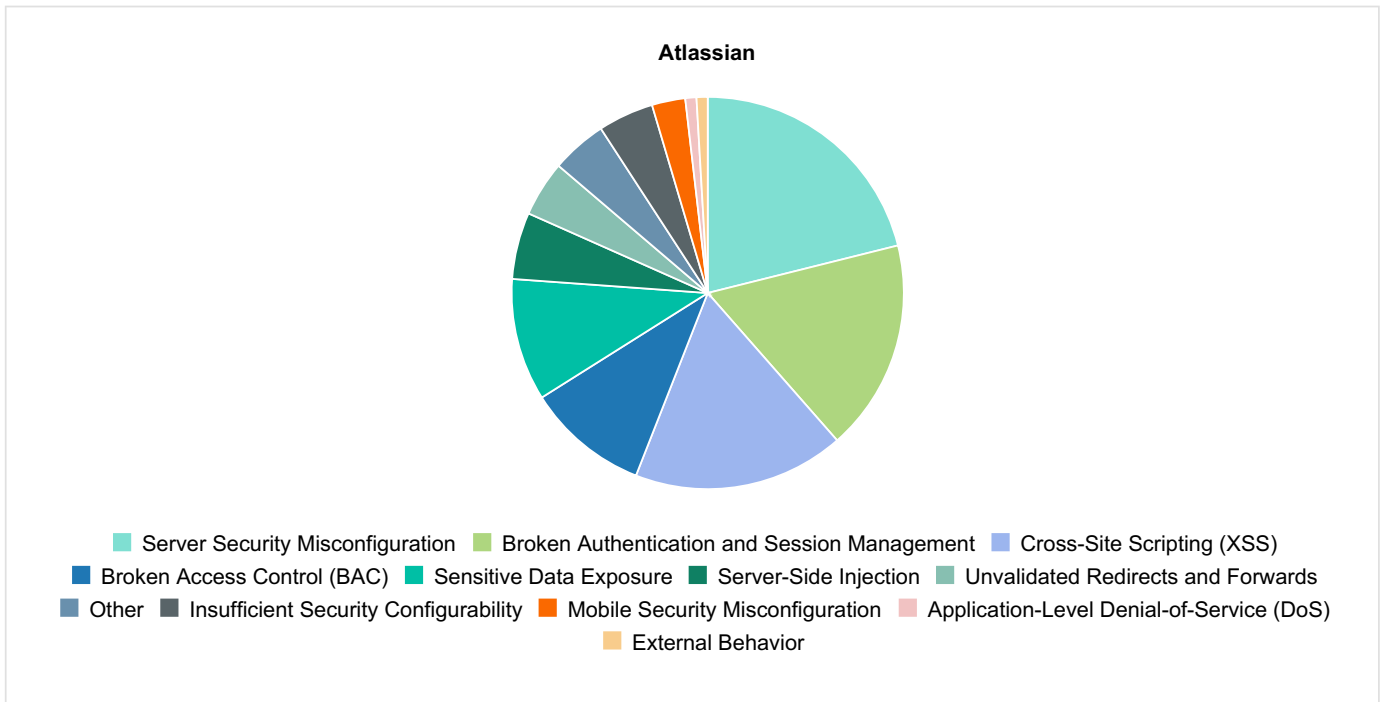

January 08, 2024

Bugcrowd Inc.  
921 Front St  
Suite 100  
San Francisco, CA 94111

### Introduction

This report shows testing of **Atlassian** between the dates of **10/01/2023 - 12/31/2023**. During this time, **246** researchers from Bugcrowd submitted a total of **415** vulnerability submissions against **Atlassian's** targets. The purpose of this assessment was to identify security issues that could adversely affect the integrity of Atlassian. Testing focused on the following:

1. **Atlassian Access** (<https://admin.atlassian.com/atlassian-access>)
2. **Atlassian Admin** (<https://admin.atlassian.com/>)
3. **Atlassian Identity** (<https://id.atlassian.com/login>)
4. **Atlassian Start** (<https://start.atlassian.com>)
5. **Bitbucket Cloud** including **Bitbucket Pipelines** (<https://bitbucket.org>)
6. **Confluence Cloud** (<bugbounty-test-<bugcrowd-name>.atlassian.net/wiki>)
7. **Confluence Cloud Premium** (<bugbounty-test-<bugcrowd-name>.atlassian.net/wiki>)
8. **Confluence Cloud Mobile App for Android**
9. **Confluence Cloud Mobile App for iOS**
10. **Jira Cloud Mobile App for Android**
11. **Jira Cloud Mobile App for iOS**
12. **Jira Service Management Cloud** (<bugbounty-test-<bugcrowd-name>.atlassian.net>)
13. **Jira Software Cloud** (<bugbounty-test-<bugcrowd-name>.atlassian.net>)
14. **Jira Work Management Cloud** formerly **Jira Core** (<bugbounty-test-<bugcrowd-name>.atlassian.net>)
15. **Any associated \*.atlassian.com or \*.atl-paas.net domain that can be exploited DIRECTLY from the \*.atlassian.net instance**
16. **Atlassian Compass**
17. **Atlassian Marketplace** (<https://marketplace.atlassian.com>)
18. **Atlassian Atlas**
19. **Bitbucket Data Center**
20. **Confluence Data Center**
21. **Crowd**
22. **Jira Core Data Center**
23. **Jira Service Management Data Center**
24. **Jira Software Data Center**
25. **\*.atlastunnel.com**
26. **Any other \*.atlassian.com or \*.atl-paas.net domain that cannot be exploited directly from a \*.atlassian.net instance**
27. **Bamboo**
28. **Confluence Companion App for macOS and Windows**
29. **Confluence Data Center Mobile App for Android**

30. **Confluence Data Center Mobile App for iOS**
31. **Crucible**
32. **FishEye**
33. **Jira Data Center Mobile App for Android**
34. **Jira Data Center Mobile App for iOS**
35. **Sourcetree for macOS and Windows (<https://www.sourcetreeapp.com/>)**
36. **Other - (all other Atlassian targets)**
37. **Jira Product Discovery**
38. **Beacon**
39. **Forge Platform**
40. **GraphQL API ([bugbounty-test-<bugcrowd-name>.atlassian.net/gateway/api/graphql](https://bugbounty-test-<bugcrowd-name>.atlassian.net/gateway/api/graphql))**
41. **<https://www.npmjs.com/package/@forge/cli>**

The assessment was performed under the guidelines provided in the statement of work between **Atlassian** and Bugcrowd. This letter provides a high-level overview of the testing performed, and the result of that testing.

### Atlassian Program Overview

An Atlassian program is a novel approach to a penetration test. Traditional penetration tests use only one or two researchers to test an entire scope of work, while an Ongoing program leverages a crowd of security researchers. This increases the probability of discovering esoteric issues that automated testing cannot find and that traditional vulnerability assessments may miss, in the same testing period.

It is important to note that this document represents a point-in-time evaluation of security posture. Security threats and attacker techniques evolve rapidly, and the results of this assessment are not intended to represent an endorsement of the adequacy of current security measures against future threats. This document contains information in summary form and is therefore intended for general guidance only; it is not intended as a substitute for detailed research or the exercise of professional judgment. The information presented here should not be construed as professional advice or service.

### Testing Methods

This security assessment leveraged researchers that used a combination of proprietary, public, automated, and manual test techniques throughout the assessment. Commonly tested vulnerabilities include code injection, cross-site request forgery, cross-site scripting, insecure storage of sensitive data, authorization/authentication vulnerabilities, business logic vulnerabilities, and more.

### Summary of Findings

During the program, Bugcrowd discovered the following:

Count	Technical Severity
4	<b>Critical</b> vulnerabilities
5	<b>High</b> vulnerabilities
39	<b>Medium</b> vulnerabilities
12	<b>Low</b> vulnerabilities

Count	Technical Severity
60	<span data-bbox="245 264 395 295">Informational</span> findings